


Rigid Side Wall Direct Vent Kit



Direct venting with DuraVent's Oil Vent Pro is a professionally engineered, easy to install vent system for oil or gas B10 and SG Boilers. It features a smooth interior to reduce whistling and friction loss and utilizes a quick connect / release twist-lock design on the vent pipe that requires no tools. No sealant is needed on the vent pipe joints. Adjustable vent pieces make for an easy installation so that you always get your final lengths without cutting. Concentric termination is designed with a removable end-snout for easy servicing and installation, replaceable if ever damaged. The strong outer wall prevents damage and denting; paintable using high temperature stove paint.

- Stylish clean look
- Removable exhaust cap – easily detachable for cleaning
- Removable air intake snout – for installation ease
- Continuous exhaust pipe – eliminates the chance for cross contamination
- Accommodates wall thicknesses up to 14"
- Concealed air intake – reduces the amount of exhaust recirculation
- Swivel end – adds adjustability
- Attaches directly to DuraVent's L-Vent pipe
- Lightweight

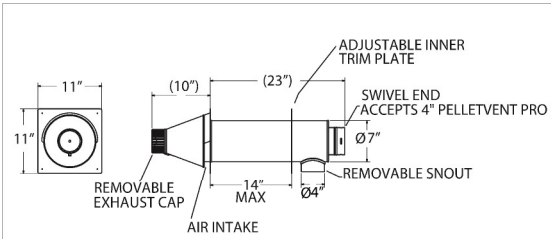

Gas / Oil Vent Kit	Boiler	QHT ORDER#	List
DVF -4 RIGID	B10 -3,4,5,6	DVF -4	\$1,139.00

Kit includes: 6" to 4" adapter, 2 4"-elbows, 4" x 36" rigid length, 4" x 24" rigid length, 3" to 16" pipe extension, 4" concentric termination, 4" x 10' Aluminum intake flex duct, 4" tee, 4" 90, 4" vacuum relief, L4006A safety high limit, 3/4" immersion well, 1 1/2" x 3/4" x 1 1/2" tee

This kit provides approximately 10 feet of equivalent length. This kit can be extended to 20 feet of equivalent length.

Flexible Side Wall Direct Vent Kit



Direct venting with Z-Flex Oil Vent is a professionally engineered, easy to install vent system for oil B10 and SG Boilers. It features a flexible vent piece that makes for an easy installation so that you always get to your final length. The concentric termination is designed with a round diffuser that helps disperse the exhaust gases away from the intake side of the pipe to reduce the risk of any contamination. The strong outer wall prevents damage and denting.

- Stylish clean look
- Removable air intake snout – for installation ease
- Continuous exhaust pipe – eliminates chance for cross contamination
- Accommodates wall thicknesses up to 11"
- Concealed air intake – reduces the amount of exhaust recirculation
- Lightweight

Oil Only Vent Kit	Boiler	QHT ORDER#	List
DVH -5 FLEXIBLE KIT	B10 -3,4,5,6; SG -3,4	DVH -5 COMBO	\$1024.00

Kit includes: 6" to 5" adapter, 6" elbow, 5" elbow, 5" x 8' double wall flex pipe, 5" double wall adapter, 5" concentric termination, 5" x 2' insulation sleeve, 4" x 8' Aluminum intake flex duct, 4" tee, 4" 90, 4" vacuum relief, L4006A safety high limit, 3/4" immersion well, 1 1/2" x 3/4" x 1 1/2" tee.

This kit provides approximately 10 feet of total exhaust length. THIS KIT CANNOT BE EXTENDED.