

Recessed Pocket Wall Units Fully Integrated Pocket Wall Fan Convertors

Manufactured from high grade zinc coated steel. Painted with a neutral color baked enamel finish.


Constructed from expanded copper tubes at 300 PSI, and sealed for quality. Maximum heat transfer over the coil.

The fan and motor assembly consists of a replaceable "easy glide" sleeve or, UL/CSA specifications. This is a whisper quiet without vibration.

The LTC - fan switches designed to close with a tolerance designed to close.

Connections are 1/2" sweat connections. A water vent with wide convenient.

Installation is required. All that's required is to knock out the L1 and L2 leads. There is a knockout to get at the ground.

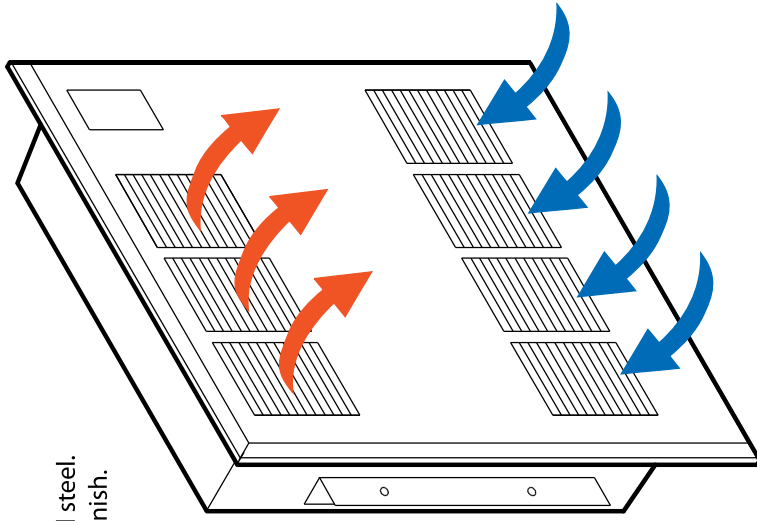

Environmental



Perimeter Units

PS11 Fan Convertors

EL-100 In Floor Units

POCKET WALL

BY SMITH'S ENVIRONMENTAL PRODUCTS

Recessed Pocket Wall Units Fully Integrated Pocket



- The PWU Pocket Wall Units Come Completely Assembled And Installed
- 5 Sizes With Outputs Ranging From As Low As 1730 BTU/HR To As High As 10,000 BTU/HR
- Whisper Quiet Operation That Quiet-One Products Are Known For
- Attractive And Highly Crafted Grille Design
- Easily Accessible Air Vent Is Built Into The Product


The Pocket Wall Unit

The perfect product for foyers, hallways, family rooms, finished basements and even for taking the chill off of a garage



PWU's Thermal Performance					
Model	Flow (Gals.)	Entering Water Temperature (Entering Air)			
		140°F	150°F	160°F	170°F
PWU 2/3	1 GPM	1730	1942	2153	2415
	3 GPM	2142	2359	2538	2786
	5 GPM	2298	2516	2725	2983
PWU 4/6	1 GPM	2529	2961	3285	3663
	3 GPM	3294	3645	4050	4482
	5 GPM	4050	4410	4815	5220
PWU 6/8	1 GPM	3525	4016	4441	4880
	3 GPM	4435	4918	5429	6010
	5 GPM	5292	5717	6260	6856
PWU 8/10	1 GPM	4185	4689	5175	5634
	3 GPM	5211	5724	6291	6966
	5 GPM	6030	6480	7110	7840
PWU 13/15	1 GPM	7002	8352	9180	10215
	3 GPM	8154	9045	10017	11556
	5 GPM	8640	9675	10575	12060

Dimensions						
Front Panel	A		B		G	
PWU 2/3	16 1/2"	14 3/4"	14 3/4"	14 3/4"	3 1/2"	3 1/2"
PWU 4/6	19 1/2"	17 1/8"	17 1/8"	17 1/8"	3 1/2"	3 1/2"
PWU 6/8	19 1/2"	17 1/8"	17 1/8"	17 1/8"	3 1/2"	3 1/2"
PWU 8/10	19 1/2"	21"	21"	21"	3 1/2"	3 1/2"
PWU 13/15	19 1/2"	31 1/2"	31 1/2"	31 1/2"	3 1/2"	3 1/2"
Chassis	C	D	E	F	G	
PWU 2/3	14 1/2"	7 1/8"	3/8"	12 1/8"	3 1/2"	3 1/2"
PWU 4/6	17 1/2"	7 1/8"	3/8"	14 1/8"	3 1/2"	3 1/2"
PWU 6/8	17 1/2"	7 1/8"	3/8"	14 1/8"	3 1/2"	3 1/2"
PWU 8/10	17 1/2"	7 1/8"	3/8"	18 1/8"	3 1/2"	3 1/2"
PWU 13/15	17 1/2"	7 1/8"	3/8"	28 1/8"	3 1/2"	3 1/2"

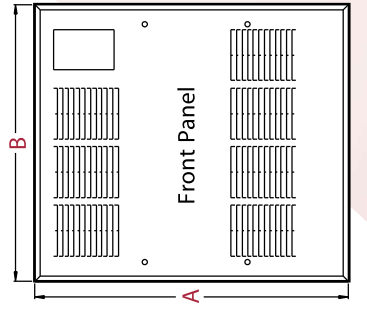

comes out of the box

r.

r.

r.

-Hr.

U/Hr.

quite possibly the leading in the industry.

family, the PWU is thanks to our proven

choice in premium.

exchanger is fully utilizes the air into the room.

our products allows

are easily accessed due gravity-glide

you'll be off the job

standards.